

RETRO-Fusion™ 500

500W Incandescent Replacement LED Engine
120V • 277V • 240VAC • CSA

Energy efficient LED Light Engine

Designed to retrofit directly into existing fixtures.

The RETRO-Fusion is a CSA listed, Energy Star 2.0 retrofit kit that rapidly transforms existing inefficient incandescent fixtures into energy efficient LED fixtures. Our patented technology allows the fixture to smoothly dim from 0-100% utilizing existing dimming technology. Retrofit kits are available with a variety of options for both recessed and pendant style fixtures. Installation is as easy as changing a light bulb. Our LED technology creates even fields and delivers consistent color. The RETRO-Fusion 500 delivers more light than most 500 watt incandescent bulbs it replaces with only a 49 watt load.



What the RETRO IS

- More cost effective than fixture replacement
- Large lumen output for this section of the market
- Listed for screw in replacement
- Energy Star certified 2.0
- Dims on existing dimming systems with no additional installation of control system
- 0-100% dimming without flicker, pulse, or stepping
- 80+ High CRI

Electrical Data

- 49 Watts (49.07)
- Power Factor (PF) .9955
- Lumens: 5676 @ 2700K
- Lumens per watt: 115.67
- LM 70: >50,000 Hours
- CRI@2700K: 82,R9+4.9
- 1 lb 12.9 oz - 15.1 w/ Reflector

Applications

- 9 feet to 50 feet high ceilings
- Where dimming is a key concern
- Where there is no desire or budget to replace existing fixtures
- Where access is limited
- Where Energy Star is required
- Where a custom solution is required
- Where the ceiling cannot be disturbed

Typical Installations

- Auditoriums
- Houses of worship
- Arenas
- Lobbies
- Museums
- Educational facilities
- Convention centers

Base Types

E26- Edison

E11- Mini Candelabra

CCT Lumen Output

2700K: 5676 Lumens

3000K: 6024 Lumens

3500K: 6239 Lumens

4000K: 6309 Lumens

5000K: 6372 Lumens

Fixture Lenses

Tall 15 Degrees

Tall 23 Degrees

Tall 46 Degrees

Short 26 Degree

Short 40 Degree

Short 59 Degrees

Short 70 Degrees

None 120 Degrees

Color Temp

2700K -

3000K - Standard

3500K -

4000K -

5000K -

Order Guide

	-		-		-		-		-		-		-		-	
--	---	--	---	--	---	--	---	--	---	--	---	--	---	--	---	--

Fixture Type	Base Type		Color Temp	CRI*	Optics	Accessories	Housings	Warranty
R500 - F	E11	E26	2700K	80, 90, 97	Tall 15	Diffuser	Pendant Large	10 Year LED Array
	1 3/4"	1"	3000K	80, 90, 97	Tall 23	E26 Extender 1"	Pendant Small	3 Year Standard
	2 3/4"	1 1/2"	3500K	80, 90	Tall 46	E26 Extender 2"	Recessed Can	+1
	4"	2 1/2"	4000K	80, 90, 97	Short 26	Small Slope Adapter		+2
			5000K	80, 90	Short 40	Large Slope Adapter		+3
					Short 59			+4
					Short 70			+5
					NONE- 120 Degrees			+6
								+7

*E39 and BD15A require an E26 base with adaptors used to make this unit compatible with these base types.


* Chips with a CRI greater than 80 are an additional 6 weeks beyond standard delivery

RETRO-Fusion™ 500

500W Incandescent Replacement LED Engine
120V • 277V • 240VAC • CSA


CANTOUSA
INNOVATIVE LIGHTING PRODUCTS

Fixture Drawing

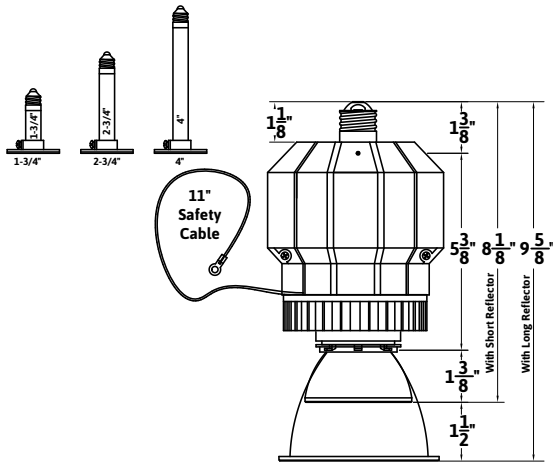

Short

Weight: 1lb 12.9oz w/Reflector

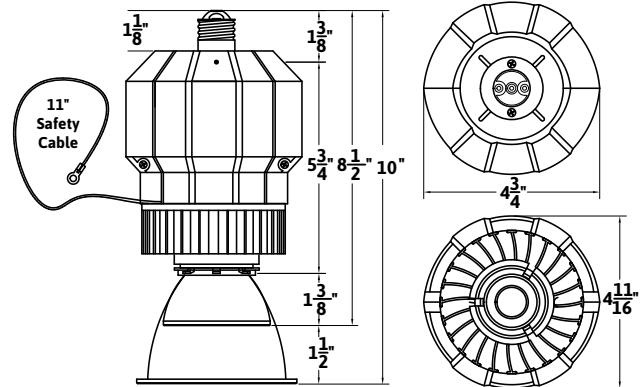

Tall

Weight: 1lb 15.1oz w/Reflector

Photometrics (R500) 3,000K

Multiplication Factor for Color Temperature

- to convert to 2,700 Kelvin - fc X .9488
- to convert to 3,500 Kelvin - fc X 1.0196
- to convert to 4,000 Kelvin - fc X 1.0439
- to convert to 5,000 Kelvin - fc X 1.0617

To Solve Footcandles
Over A Distance

Peak Output ÷ (Distance X Distance)

To Solve Area Over A
Distance

Distance X Mult.Factor

Mult. Factor 0.4617 Distance	26° Diameter	Peak Output 10,817fc Foot Candles	Mult. Factor 0.7279 Distance	40° Diameter	Peak Output 7,086fc Foot Candles	Mult. Factor 1.1315 Distance	59° Diameter	Peak Output 4,386c Foot Candles	Mult. Factor 1.4004 Distance	70° Diameter	Peak Output 2,568c Foot Candles
8'	4'	172	8'	6'	109	8'	9'	69	8'	11'	43
10'	5'	109	10'	7'	70	10'	11'	44	10'	14'	25
20'	9'	26	20'	15'	17	20'	23'	10	20'	28'	7
30'	14'	12	30'	22'	8	30'	34'	5	30'	42'	3
40'	18'	7	40'	29'	5	40'	45'	3	40'	56'	1
Mult. Factor 0.2633 Distance	15° Diameter	Peak Output 20,965fc Foot Candles	Mult. Factor 0.4069 Distance	23° Diameter	Peak Output 11,313fc Foot Candles	Mult. Factor .8489 Distance	46° Diameter	Peak Output 5,115fc Foot Candles	Mult. Factor 3.4641 Distance	120° Diameter	Peak Output 1,637fc Foot Candles
8'	2'	328	8'	3'	262	8'	7'	80	8'	28'	26
10'	3'	210	10'	4'	168	10'	8'	51	9'	31'	20
20'	5'	52	20'	8'	42	20'	17'	13	10'	35'	16
30'	8'	23	30'	12'	19	30'	25'	6	12'	42'	11
40'	11'	13	40'	16'	10	40'	34'	3	15'	52'	7
									20'	69'	4

Contact your local representative or dealer for IES files.