

# RETRO-Fusion™ 1000

1000W Incandescent Replacement LED Engine  
120V • 277V • 240VAC • CSA

**CANTOUSA**  
INNOVATIVE LIGHTING PRODUCTS

## Energy efficient LED Light Engine

Designed to retrofit directly into existing fixtures.

The RETRO-Fusion is a CSA listed, Energy Star 2.0 retrofit kit that rapidly transforms existing inefficient incandescent fixtures into energy efficient LED fixtures. Our patented technology allows the fixture to smoothly dim from 0-100% utilizing existing dimming technology. Retrofit kits are available with a variety of options for both recessed and pendant style fixtures. Installation is as easy as changing a light bulb. Our LED technology creates even fields and delivers consistent color. The RETRO-Fusion 1000 delivers more light than most 1000 watt incandescent bulbs it replaces with only a 90 watt load.

**10 Year  
LED Array  
Warranty**



### What the RETRO IS

- More cost effective than fixture replacement
- Large lumen output for this section of the market
- Listed for screw in replacement
- Energy Star certified 2.0
- Dims on existing dimming systems with no additional installation of control system
- 0-100% dimming without flicker, pulse, or stepping
- 80+ High CRI

### Electrical Data

- 90 Watts
- Power Factor (PF) .9955
- Lumens: 10133 @ 2700K
- Lumens per watt: 112.3
- LM 70: >50,000 Hours
- CRI@2700K: 81.11, R9+1.8
- 1 lb 15.1 oz w/Reflector

### Applications

- 15 feet to 100 feet high ceilings
- Where dimming is a key concern
- Where there is no desire or budget to replace existing fixtures
- Where access is limited
- Where Energy Star is required
- Where a custom solution is required
- Where the ceiling cannot be disturbed

### Typical Installations

- Auditoriums
- Houses of worship
- Arenas
- Lobbies
- Museums
- Educational facilities
- Convention centers

### Base Types

E26- Edison

E11- Mini Candelabra

### CCT Lumen Output

2700K: 10,133 Lumens

3000K: 10,611 Lumens

3500K: 10,876 Lumens

4000K: 10,961 Lumens

5000K: 11,127 Lumens

### Fixture Lenses

Tall 15 Degrees

Tall 23 Degrees

Tall 46 Degrees

Short 26 Degree

Short 40 Degree

Short 59 Degrees

Short 70 Degrees

None 120 Degrees

### Color Temp

2700K -

3000K - Standard

3500K -

4000K -

5000K -

### Order Guide

	-		-		-		-		-		-		-		-	
--	---	--	---	--	---	--	---	--	---	--	---	--	---	--	---	--

Fixture Type	Base Type		Color Temp	CRI*	Optics	Accessories	Housings	Warranty
R1000 - F	<b>E11</b>	<b>E26</b>	2700K	80, 90, 97	Tall 15	Diffuser	Pendant Large	10 Year LED Array
	1 3/4"	1"	3000K	80, 90, 97	Tall 23	E26 Extender 1"	Pendant Small	3 Year Standard
	2 3/4"	1 1/2"	3500K	80, 90	Tall 46	E26 Extender 2"	Recessed Can	+1
	4"	2 1/2"	4000K	80, 90, 97	Short 26	Small Slope Adapter		+2
			5000K	80, 90	Short 40	Large Slope Adapter		+3
					Short 59			+4
					Short 70			+5
					NONE- 120 Degrees			+6
								+7

\*E39 and BD15A require an E26 base with adaptors used to make this unit compatible with these base types.


\* Chips with a CRI greater than 80 are an additional 6 weeks beyond standard delivery

# RETRO-Fusion™ 1000

1000W Incandescent Replacement LED Engine  
120V • 277V • 240VAC • CSA

**CANTOUSA**  
INNOVATIVE LIGHTING PRODUCTS

## Fixture Drawing

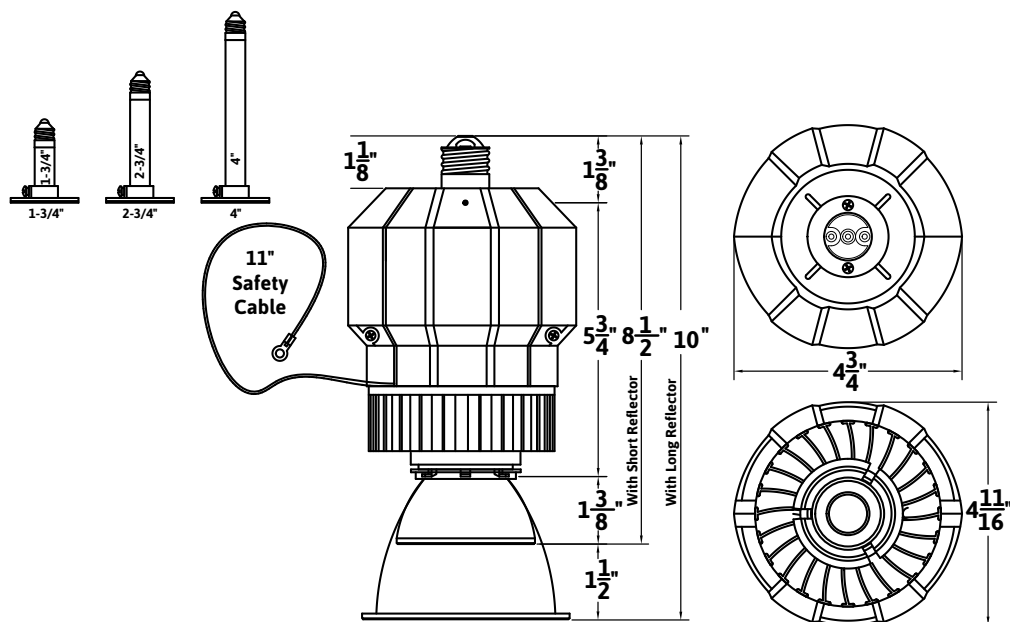

Weight: 1lbs 15.1oz w/Reflector

## Photometrics (R1000) 3,000K

Multiplication Factor for Color Temperature

- to convert to 2,700 Kelvin - fc X .9488
- to convert to 3,500 Kelvin - fc X 1.0196
- to convert to 4,000 Kelvin - fc X 1.0439
- to convert to 5,000 Kelvin - fc X 1.0617

To Solve Footcandles  
Over A Distance

To Solve Area Over A  
Distance

Peak Output  
(Distance X Distance)

Distance X Mult.Factor

Mult. Factor 0.4617 Distance	26° Diameter	Peak Output 14,514fc Foot Candles	Mult. Factor 0.7279 Distance	40° Diameter	Peak Output 11,431fc Foot Candles	Mult. Factor 1.1315 Distance	59° Diameter	Peak Output 11,309c Foot Candles	Mult. Factor 1.4004 Distance	70° Diameter	Peak Output 4,672c Foot Candles
15'	7'	82	15'	20'	49	15'	24'	48	15'	24'	20
20'	9'	47	20'	28'	27	20'	30'	27	20'	32'	12
25'	11' 6"	30	25'	36'	18	25'	39'	17	25'	38'	8
30'	14'	21	30'	42'	13	30'	45'	12	30'	46'	5
35'	16'	17	35'	44'	10	35'	50'	9			
40'	18'	13	40'	48'	8	40'	54'	7			
Mult. Factor 0.2633 Distance	15° Diameter	Peak Output 41,247fc Foot Candles	Mult. Factor 0.4069 Distance	23° Diameter	Peak Output 27,415fc Foot Candles	Mult. Factor .8489 Distance	46° Diameter	Peak Output 10,044fc Foot Candles	Mult. Factor 3.4641 Distance	120° Diameter	Peak Output 2,941fc Foot Candles
15'	2'	183	15'	8'	127	15'	15'	43	15'	52'	13
20'	2' 6"	101	20'	10'	68	20'	20'	24	20'	70'	7
25'	3' 6"	65	25'	11' 6"	43	25'	26'	15			
30'	4'	46	30'	16'	30	30'	32'	11			
35'	4' 9"	34	35'	20'	22	35'	38'	9			
40'	15' 5"	27	40'	25'	18	40'	44'	7	25'	87'	4

Contact your local representative or dealer for IES files.



1092 West Atlanta Street, SE • Suite 600 • Marietta, GA 30060 • 888-252-5912 • info@cantousa.com • cantousa.com

V 1.3 05/12/21