

RETRO-Classic™ 300

300W Incandescent Replacement LED Engine
120V • CSA

Energy efficient LED Light Engine

Designed to retrofit directly into existing fixtures.

The RETRO-Classic is a CSA listed, Energy Star 2.0 retrofit kit that rapidly transforms existing inefficient incandescent fixtures into energy efficient LED fixtures. Our patented technology allows the fixture to smoothly dim from 0-100% utilizing existing dimming technology. Retrofit kits are available with a variety of options for both recessed and pendant style fixtures. Installation is as easy as changing a light bulb. Our LED technology creates even fields and delivers consistent color. The RETRO-Classic 300 delivers more light than most 300 watt incandescent bulbs it replaces with only a 30 watt load.

**10 Year
LED Array
Warranty**



What the RETRO IS

- More cost effective than fixture replacement
- Large lumen output for this section of the market
- Listed for screw in replacement
- Energy Star certified 2.0
- Dims on existing dimming systems with no additional installation of control system
- 0-100% dimming without flicker, pulse, or stepping
- 80+ High CRI

Electrical Data

- 30 Watts (30.61)
- Lumens 3237 @ 2700K
- Power Factor (PF) .9936
- Lumens per watt: 105.74
- LM 70: >50,000 Hours
- CRI@2700K: 81.73,R9+2.6
- 1 lbs 14.4 oz w/Reflector

Applications

- 9 feet to 40 feet high ceilings
- Where dimming is a key concern
- Where there is no desire or budget to replace existing fixtures
- Where access is limited
- Where Energy Star is required
- Where a custom solution is required
- Where the ceiling cannot be disturbed

Typical Installations

- Auditoriums
- Houses of worship
- Arenas
- Lobbies
- Museums
- Educational facilities
- Convention centers

Base Types

E26- Edison
E11- Mini Candelabra
Par Ring/Bare Wire
Bi Pin
Custom Options

CCT Lumen Output

2700K: 3237 Lumens
3000K: 3416 Lumens
3500K: 3481 Lumens
4000K: 3563 Lumens
5000K: 3624 Lumens

Fixture Lenses

Tall 11 Degrees
Tall 20 Degrees
Tall 47 Degrees
Short 15 Degree
Short 28 Degree
Short 56 Degrees
Short 74 Degrees
None 120 Degrees

Color Temp

2700K -
3000K - Standard
3500K -
4000K -
5000K -

Order Guide

R300	-		-		-		-		-	
------	---	--	---	--	---	--	---	--	---	--


Base Type	Length of Stem Lift Plate (1/2")		Color Temp	CRI*	Optics	Accessories	Warranty
EB- Edison (E26)			2700K	80 is standard	Tall 11	PAR46 Ring	10 Year LED Array
MC- Mini Candelabra (E11)			3000K	80, 90, 97	Tall 20	PAR56 Ring	3 Year Standard
BW- Bare Wire			3500K	80, 90, 97	Tall 47	PAR64 Ring	+1
	E11	E26	4000K	80, 90	Short 15	Diffuser	+2
	1 3/4"	1"	5000K	80, 90, 97	Short 28	(E39) Mogul Adaptor for E26	+3
	2 3/4"	1 1/2"		80, 90	Short 56	BA15D	+4
	4"	2 1/2"			Short 74	E26 Extender	+5
	Custom Bare Wire Include Length				NONE- 120 Degrees	Adjustable Par Ring (56)(64)	+6
						Custom - Include .dwg or .pdf	+7

* Chips with a CRI greater than 80 are an additional 6 weeks beyond standard delivery

RETRO-Classic™ 300

300W Incandescent Replacement LED Engine
120V • CSA

Fixture Drawing

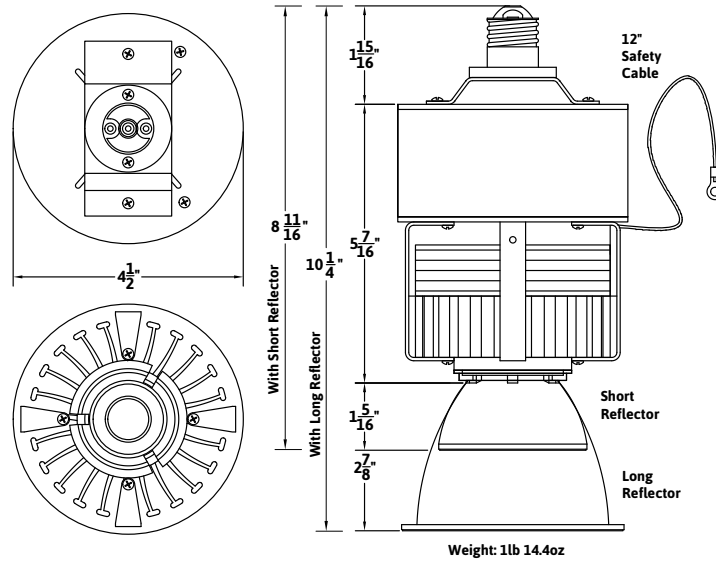

Photometrics (R300) 3,000K

Multiplication Factor for Color Temperature

- to convert to 2,700 Kelvin - fc X .9488
- to convert to 3,500 Kelvin - fc X 1.0196
- to convert to 4,000 Kelvin - fc X 1.0439
- to convert to 5,000 Kelvin - fc X 1.0617

To Solve Footcandles
Over A Distance

To Solve Area Over A
Distance

Peak Output
(Distance X Distance)

Distance X Mult.Factor

Mult. Factor 0.4617 Distance	15° Diameter	Peak Output 2,203fc Foot Candles	Mult. Factor 0.7279 Distance	28° Diameter	Peak Output 4,610fc Foot Candles	Mult. Factor 1.1315 Distance	56° Diameter	Peak Output 2,134fc Foot Candles	Mult. Factor 1.4004 Distance	74° Diameter	Peak Output 1,134fc Foot Candles
8'	2'	360	8'	4'	141	8'	9'	61	8'	11'	41
10'	3'	222	10'	5'	85	10'	11'	37	10'	14'	25
20'	5'	49	20'	10'	18	20'	21'	8	20'	28'	5
30'	8'	21	30'	15'	8	30'	32'	4	30'	42'	2
40'	11'	11	40'	20'	5	40'	42'	1	40'	56'	1
Mult. Factor .1926 Distance	11° Diameter	Peak Output 26,920fc Foot Candles	Mult. Factor 0.4069 Distance	20° Diameter	Peak Output 19,252fc Foot Candles	Mult. Factor .8489 Distance	47° Diameter	Peak Output 5,253fc Foot Candles	Mult. Factor 3.4641 Distance	120° Diameter	Peak Output 1,134fc Foot Candles
8'	1.5'	405	8'	3'	347	8'	7'	92	8'	28'	24
10'	2'	259	10'	4'	210	10'	9'	57	9'	31'	19
20'	4'	65	20'	7'	44	20'	17'	12	10'	35'	15
30'	6'	29	30'	11'	18	30'	25'	5	12'	42'	10
40'	8'	16	40'	14'	10	40'	34'	3	15'	52'	6
									20'	69'	3

Contact your local representative or dealer for IES files.