

RETRO-Passive® 2.0 1000


1000W Incandescent Replacement LED Engine
120V • 230V • 240VAC

Energy efficient LED Light Engine

Designed to retrofit directly into existing fixtures.

The RETRO-Passive 2.0 is a CSA listed retrofit kit that rapidly transforms existing inefficient incandescent fixtures into energy efficient LED fixtures. Our patented technology allows the fixture to smoothly dim from 0-100% utilizing existing dimming technology. Retrofit kits are available with a variety of options for both recessed and pendant style fixtures. Installation is as easy as changing a light bulb. Our LED technology creates even fields and delivers consistent color. The RETRO-Passive 2.0 1000 delivers more light than most 1000 watt incandescent bulbs it replaces with only a 90 watt load.

**10 Year
LED Array
Warranty**

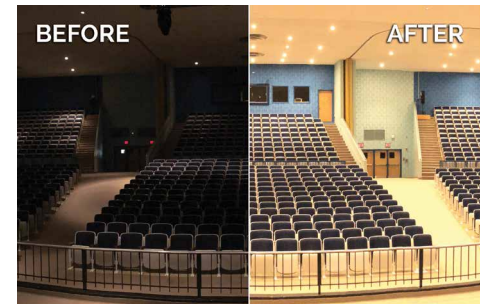

Fairfax High School, Fairfax, Virginia
105 RETRO 500s at 3000K
Installed by Artistic Concepts Group

What the Fusion 2.0 IS

- More cost effective than fixture replacement
- Large lumen output for this market
- Listed for screw in replacement
- Field swappable tops
- Serviceable safety cable
- Dims on existing dimming systems with no additional installation of control system
- 0-100% dimming without flicker, pulse, or stepping
- 80+ High CRI
- Standard 5 Year Limited Warranty. An extended warranty of up to 5 additional years can be added at the time of purchase

Electrical Data

- 90 Watts
- Power Factor (PF) .9955
- Lumens: 10133 @ 2700K
- Lumens per watt: 112.3
- LM 70: >50,000 Hours
- CRI@2700K: 81.11, R9+1.8
- 4 lbs 9.7oz w/Reflector (2.09 kg)

Applications

- 15 feet to 100 feet high ceilings (5 to 30 meter high ceilings)
- Where dimming is a key concern
- Where there is no desire or budget to replace existing fixtures
- Where access is limited
- Where a custom solution is required
- Where the ceiling cannot be disturbed

Typical Installations

- Auditoriums
- Churches and houses of worship
- Arenas
- Lobbies
- Museums
- Educational facilities
- Convention centers

Top Types

E26 - Edison
E39 - Mogul *
BA15D *
Par Ring/Bare Wire
Bi-Pin
Custom Options

CCT Lumen Output

2700K: 10,133 Lumens
3000K: 10,611 Lumens
3500K: 10,876 Lumens
4000K: 10,961 Lumens
5000K: 11,127 Lumens


Fixture Reflectors

Tall 15 Degrees
Tall 23 Degrees
Tall 46 Degrees
Short 26 Degree
Short 40 Degree
Short 59 Degrees
Short 70 Degrees
None 120 Degrees

Color Temp

2700K -
3000K - Standard
3500K -
4000K -
5000K -

Fixture Drawing

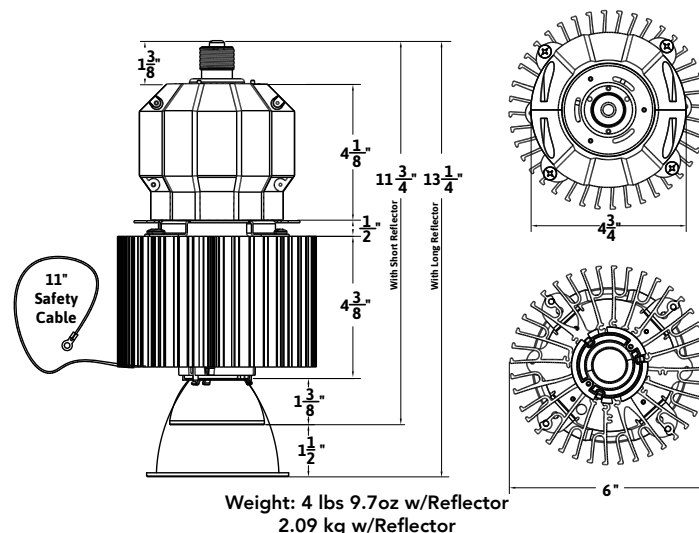

ATTENTION: If your space has been designed with multiple RETRO models, please contact the factory to discuss fade and dimming options for your space.

RETRO-Passive® 2.0 1000

1000W Incandescent Replacement LED Engine
120V • 230V • 240VAC

Order Guide

1. RETRO

00	P2		1000			
LIGHT	VOLTAGE	FIXTURE TYPE	SINK SIZE	COLOR TEMP	CRI	
P2	120 230	1000	X (Standard)	2.7K 3.0K 3.5K 4.0K 5.0K	80 *90 *97	

* Chips with a CRI greater than 80 are an additional 6 weeks beyond standard delivery

2. TOPS

00	TOP		
TOP	TYPE	LENGTH	
TOP	E26 → 1.35" or *CCC BW (Bare Wire) → 12" min, increase in 6" increments		

*Custom height in inches to the nearest 1/4" from the top to the plate to the tip.
Note: E11 is unavailable for the 700 and 1000

3. REFLECTOR

00			
REFLECTOR	DEGREE	SIZE	
REF	15 → T 23 → T 46 → T 26 → S 40 → S 59 → S 70 → S		
ZOR (ZORYA)	25		

4. ADAPTER & EXTENDER OPTIONS

00		
TYPE	TYPE	
ADP → *BAYONET (BA15D)		
ADP → *MOGUL (E39 TO E26)		
EXT → 1.25" or 2.5"		

*E39 and BA15D require an E26 top with adapters used to make this unit compatible with these top types.

5. DIFFUSERS

00	DIF	
DIFFUSER	TYPE	
DIF	SMALL (For Shorts) LARGE (For Talls) KIT (For Shorts and Talls)	

Photometrics (R1000) 3,000K

Multiplication Factor for Color Temperature

- to convert to 2,700 Kelvin - fc X .9488
- to convert to 3,500 Kelvin - fc X 1.0196
- to convert to 4,000 Kelvin - fc X 1.0439
- to convert to 5,000 Kelvin - fc X 1.0617

To Solve Footcandles
Over A Distance

Peak Output ÷ (Distance X Distance)

To Solve Area Over A
Distance

Distance X Mult.Factor

26° Mult. Factor 0.4617 Distance Diameter Peak Output 14,514fc Foot Candles	40° Mult. Factor 0.7279 Distance Diameter Peak Output 11,431fc Foot Candles	59° Mult. Factor 1.1315 Distance Diameter Peak Output 11,309fc Foot Candles	70° Mult. Factor 1.4004 Distance Diameter Peak Output 4,672c Foot Candles
15' 7' 82 20' 9' 47 25' 11' 6" 30 30' 14' 21 35' 16' 17 40' 18' 13	15' 20' 49 20' 28' 27 25' 36' 18 30' 42' 13 35' 44' 10 40' 48' 8	15' 24' 48 20' 30' 27 25' 39' 17 30' 45' 12 35' 50' 9 40' 54' 7	15' 24' 20 20' 32' 12 25' 38' 8 30' 46' 5
15° Mult. Factor 0.2633 Distance Diameter Peak Output 41,247fc Foot Candles	23° Mult. Factor 0.4069 Distance Diameter Peak Output 27,415fc Foot Candles	46° Mult. Factor .8489 Distance Diameter Peak Output 10,044fc Foot Candles	120° Mult. Factor 3.4641 Distance Diameter Peak Output 2,941fc Foot Candles
15' 2' 183 20' 2' 6" 101 25' 3' 6" 65 30' 4' 46 35' 4' 9" 34 40' 15' 5" 27	15' 8' 127 20' 10' 68 25' 11' 6" 43 30' 16' 30 35' 20' 22 40' 25' 18	15' 15' 43 20' 20' 24 25' 26' 15 30' 32' 11 35' 38' 9 40' 44' 7	15' 52' 13 20' 70' 7 25' 87' 4

Contact your local representative or dealer for IES files.

ATTENTION: If your space has been designed with multiple RETRO models, please contact the factory to discuss fade and dimming options for your space.

