

RETRO-Fusion™ 150

150W Incandescent Replacement LED Engine
120V • 230V • 277V • 240VAC • CSA

Energy efficient LED Light Engine

Designed to retrofit directly into existing fixtures.

The RETRO-Fusion is a CSA listed, Energy Star 2.0 retrofit kit that rapidly transforms existing inefficient incandescent fixtures into energy efficient LED fixtures. Our patented technology allows the fixture to smoothly dim from 0-100% utilizing existing dimming technology. Retrofit kits are available with a variety of options for both recessed and pendant style fixtures. Installation is as easy as changing a light bulb. Our LED technology creates even fields and delivers consistent color. The RETRO-Fusion 150 delivers more light than most 150 watt incandescent bulbs it replaces with only a 17 watt load.

**10 Year
LED Array
Warranty**



What the RETRO IS

- More cost effective than fixture replacement
- Large lumen output for this section of the market
- Listed for screw in replacement
- Energy Star certified 2.0
- Dims on existing dimming systems with no additional installation of control system
- 0-100% dimming without flicker, pulse, or stepping
- 80+ High CRI

Electrical Data

- 17 Watts (17.5)
- Lumens 2103 @ 2700K
- Power Factor (PF) .9886
- Lumens per Watt: 120.17
- LM 70: >50,000 Hours
- CRI@2700K: 81.83,R9+3
- 1 lb 5.2 oz - 6 oz w/Reflector

Applications

- 9 feet to 20 feet high ceilings
- Where dimming is a key concern
- Where there is no desire or budget to replace existing fixtures
- Where access is limited
- Where Energy Star is required
- Where a custom solution is required
- Where the ceiling cannot be disturbed

Typical Installations

- Auditoriums
- Houses of worship
- Arenas
- Lobbies
- Museums
- Educational facilities
- Convention centers

Base Types

E26- Edison
E11- Mini Candelabra

CCT Lumen Output

2700K: 2103 Lumens
3000K: 2217 Lumens
3500K: 2261 Lumens
4000K: 2314 Lumens
5000K: 2354 Lumens

Fixture Lenses

Tall 11 Degrees
Tall 20 Degrees
Tall 47 Degrees
Short 15 Degree
Short 28 Degree
Short 56 Degrees
Short 74 Degrees
None 120 Degrees

Color Temp

2700K -
3000K - Standard
3500K -
4000K -
5000K -

Order Guide

	-		-		-		-		-		-	
--	---	--	---	--	---	--	---	--	---	--	---	--

Fixture Type	Base Type	Color Temp	CRI*	Optics	Accessories	Warranty
R150 Short - F	E11	2700K	80, 90, 97	Tall 11	Diffuser	10 Year LED Array
R150 Tall - F	E26	3000K	80, 90, 97	Tall 20	E26 Extender 1"	3 Year Standard
	1 3/4"	3500K	80, 90	Tall 47	E26 Extender 2"	+1
	2 3/4"	4000K	80, 90, 97	Short 15	Small Slope Adapter	+2
	4"	5000K	80, 90	Short 28	Large Slope Adapter	+3
	E39 - Mogul *		*If blank 80 is issued	Short 56		+4
	BD15A *			Short 74		+5
	Specific Height			NONE- 120 Degrees		+6
						+7

*E39 and BD15A require an E26 base with adaptors used to make this unit compatible with these base types.


* Chips with a CRI greater than 80 are an additional 6 weeks beyond standard delivery

RETRO-Fusion™ 150

150W Incandescent Replacement LED Engine
120V • 230V • 277V • 240VAC • CSA

CANTOUSA
INNOVATIVE LIGHTING PRODUCTS

Fixture Drawing

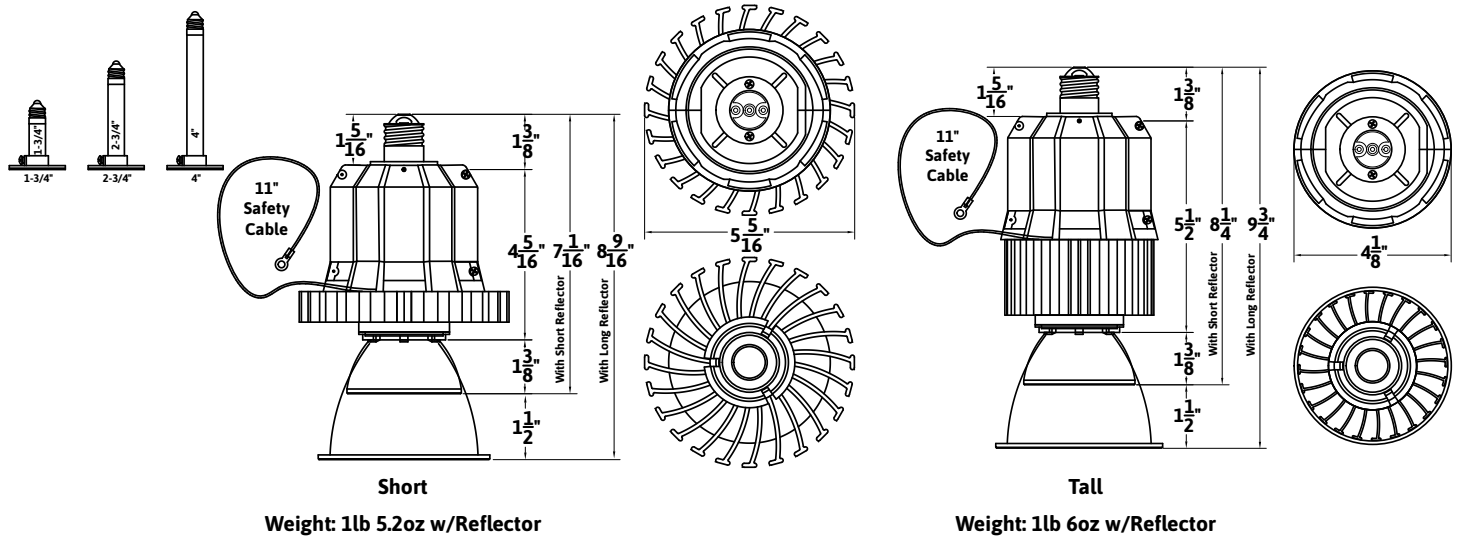

Photometrics (R150) 3,000K

Multiplication Factor for Color Temperature

- to convert to 2,700 Kelvin - fc X .9488
- to convert to 3,500 Kelvin - fc X 1.0196
- to convert to 4,000 Kelvin - fc X 1.0439
- to convert to 5,000 Kelvin - fc X 1.0617

To Solve Footcandles
Over A Distance

Peak Output ÷ (Distance X Distance)

To Solve Area Over A
Distance

Distance X Mult.Factor

Mult. Factor 0.4617 Distance	15° Diameter	Peak Output 12,338fc Foot Candles	Mult. Factor 0.7279 Distance	28° Diameter	Peak Output 4,610fc Foot Candles	Mult. Factor 1.1315 Distance	56° Diameter	Peak Output 2,134fc Foot Candles	Mult. Factor 1.4004 Distance	74° Diameter	Peak Output 1,134fc Foot Candles
8'	2'	214	8'	4'	79	8'	9'	36	8'	11'	23
10'	3'	129	10'	5'	50	10'	11'	22	10'	14'	15
20'	5'	30	20'	10'	11	20'	21'	5	20'	28'	3
30'	8'	13	30'	15'	5	30'	32'	2	30'	42'	1
40'	11'	7	40'	20'	2	40'	42'	1	40'	56'	.1
Mult. Factor .1926 Distance	11° Diameter	Peak Output 23,360fc Foot Candles	Mult. Factor 0.4069 Distance	20° Diameter	Peak Output 11,313fc Foot Candles	Mult. Factor .8489 Distance	47° Diameter	Peak Output 2,864fc Foot Candles	Mult. Factor 3.4641 Distance	120° Diameter	Peak Output 1,134fc Foot Candles
8'	1.5'	365	8'	3'	206	8'	7'	52	8'	28'	14
10'	2'	233	10'	4'	127	10'	9'	34	9'	31'	11
20'	4'	58	20'	7'	26	20'	17'	7	10'	35'	9
30'	6'	26	30'	11'	12	30'	25'	3	12'	42'	6
40'	8'	14	40'	14'	6	40'	34'	1	15'	52'	4
									20'	69'	2

Contact your local representative or dealer for IES files.



1092 West Atlanta Street, SE • Suite 600 • Marietta, GA 30060 • 888-252-5912 • info@cantousa.com • cantousa.com

V 1.7 05/13/22